



A-SAFE

eFlex™ ForkGuard™ Kerb Barrier



Designed to provide ground level protection for walls, buildings and equipment.


The eFlex ForkGuard deflects vehicle forks in shallow angle or low-force impacts. It also acts as a pallet stop or buffer preventing stored goods encroaching into pedestrian areas or walkways.

Floor mounted and bolted from above, the eFlex ForkGuard integrates with A-SAFE barriers when installed together.


Tested to the global benchmark in barrier safety

bsi. PAS 13
Code of Practice for Workplace Safety Barriers

Engineered for performance

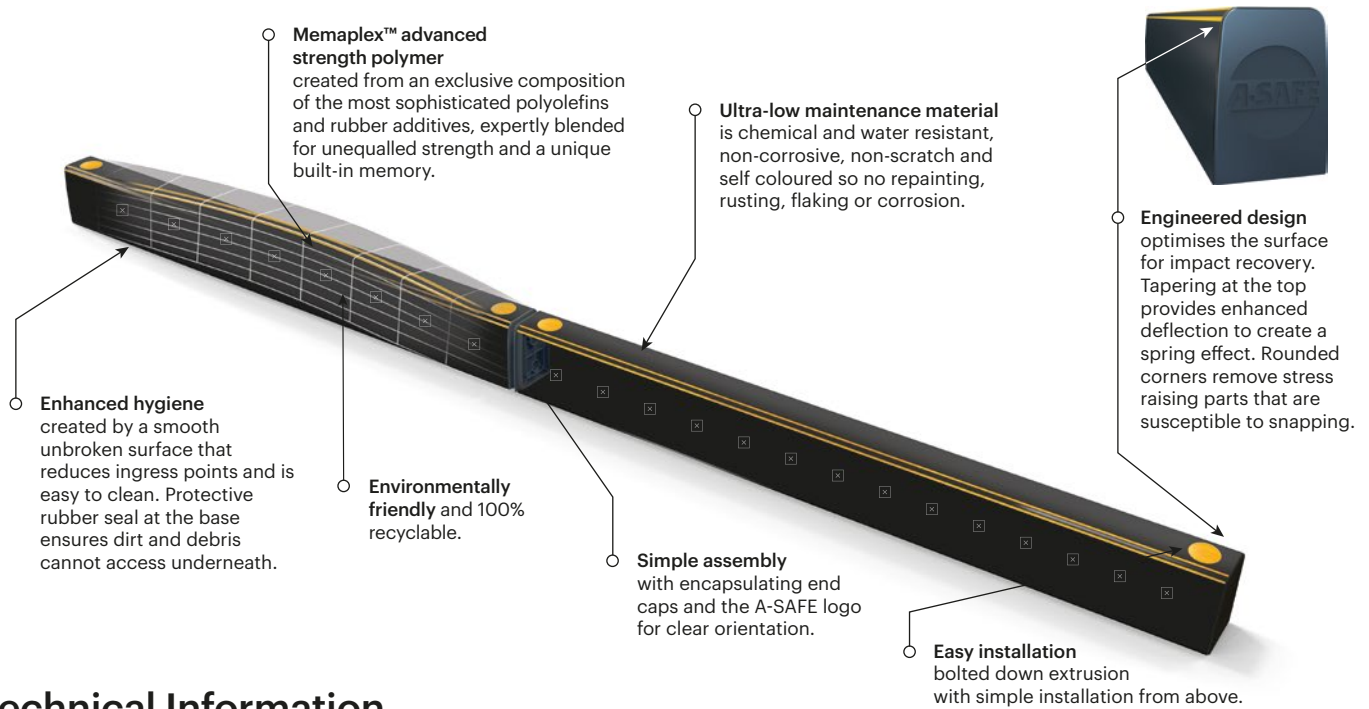


Technical Information

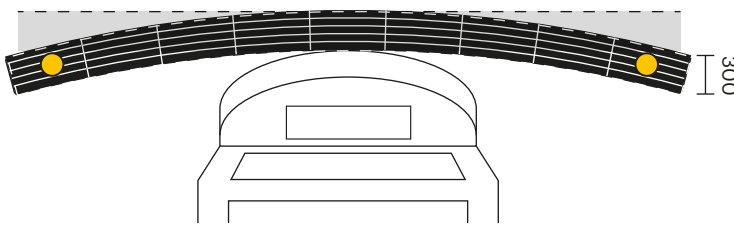
Impact Test
Max Energy (Joules) at 90° 3,000
Deflection at Max Energy 300mm


Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	No

* Weathering scale 1 is very poor and 5 is excellent
 ** Light stability scale 1 is very poor and 8 is excellent

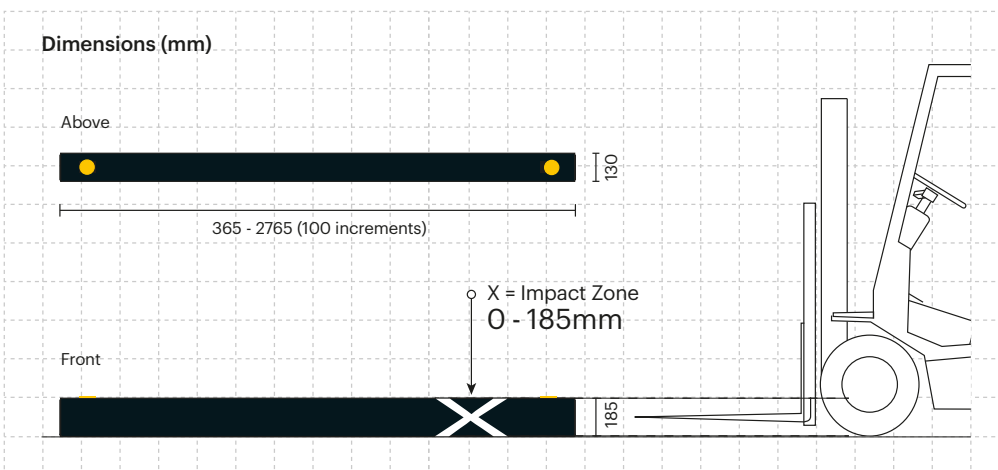

Colour Combinations

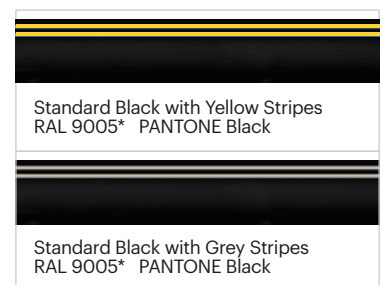

*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

